


VHF PASSBAND FILTER

High rejection of out of band frequencies

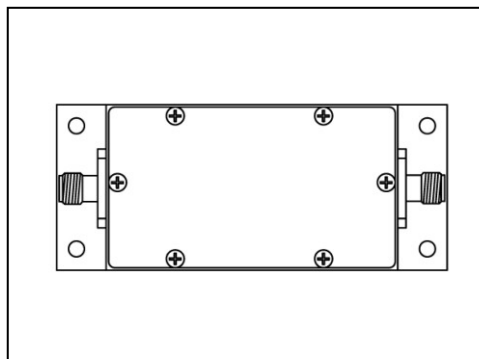


	Unit	Min	Typ.	Max.
Bandwidth	MHz	50		100
Insertion loss	dB		1	
S11	dB		-15	
Shape factor (60dB/1dB)			4.4	

Measured at 25°C, in a 50Ω system

AFL1275

Outline Drawing

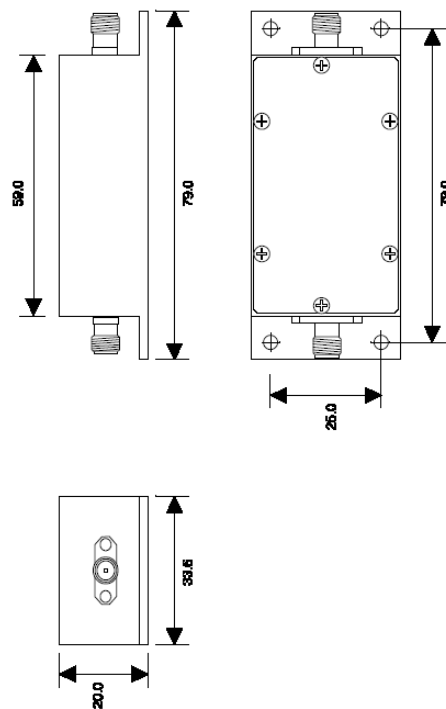

PR

RY

Échelle 1	Atlantic RF Labs	48, Avenue de pinsan 33370 ARTIGUES	 	Mat. ALU 6077 Approuvé : PD Fédér. IEC/ISO/UL/ENI Formet. AA	Dessiné PD Approuvé : PD Fédér. IEC/ISO/UL/ENI Formet. AA Ver. A
-----------	------------------	-------------------------------------	--	---	--

Finishing: Nickel-plated (except connectors)
 All dimensions in mm
 Tolerance: +/- 0.1mm